


### Specifications

HP .....	5
Tank Gallons .....	20
Max. Pressure .....	125 PSI
Delivery SCFM @	
40/90 PSI .....	8.5/6.7
Volts/Hertz/Phase .....	120/240/60/1
Amperage Req'd .....	15/7.5
Shipping Weight .....	135 lbs.
Packaged Specs	
(LxWxH) .....	36"x19"x32"
Cube .....	12.67
UPC Code .....	732422 00538 6

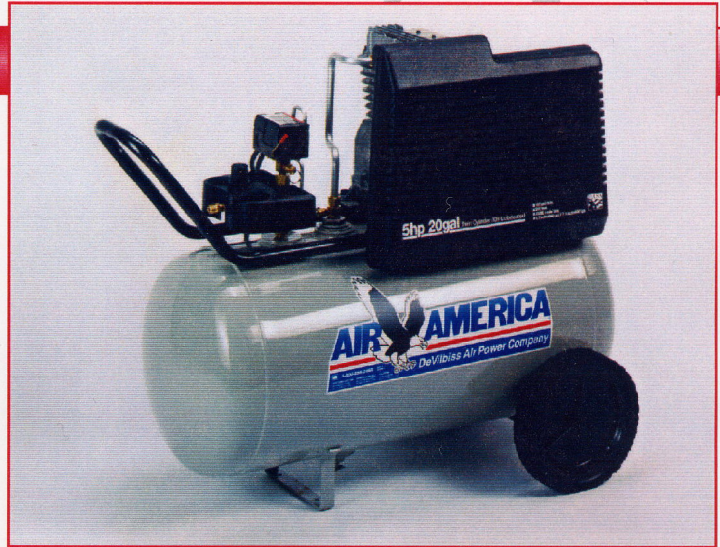

### Features

- \* 5 HP, 20 gallon portable air compressor.
- \* Oil lubricated pump designed with cast iron cylinder sleeves for wear, and aluminum body for extra cooling.
- \* 120/240V dual voltage motor; factory wired for 120V.
- \* Manual thermal overload protector in the motor to prevent low voltage motor damage.
- \* Patented automatic belt tensioning device, automotive grade pistons, rings and connecting rods.
- \* Includes regulator and two gauges.
- \* U.L. listed with ASME air tank and safety valve to meet all codes.